



PRODUCTION

DO NOT SCALE

269A9268

REVISIONS

SYM	E.O.'S	DESCRIPTION	DRWN	APP'D	DATE

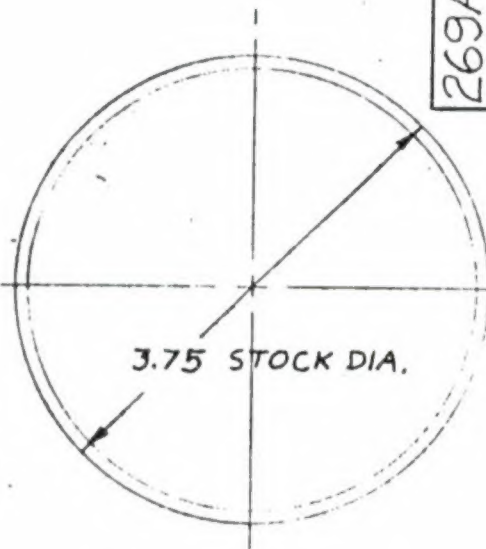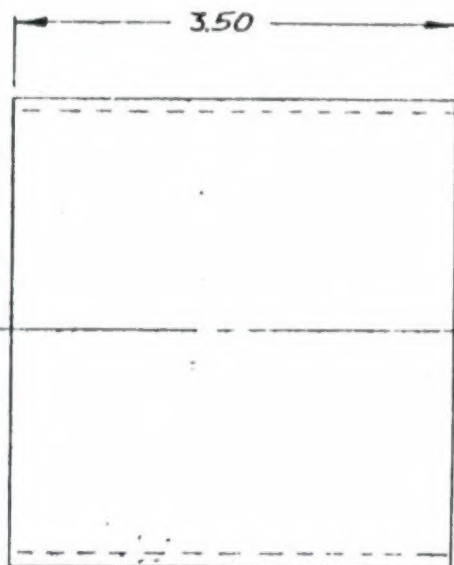

3. REMOVE BURRS

2. IDENTIFY PER. HP 8-5 (INK STAMP)

1. VIRIDITE PER HP4-57

NOTES:

REQD		PART NO.		REQD		PART NO.		NAME		SIZE		DESCRIPTION		SPECIFICATION	
ASSEMBLY OPP.				ASSEMBLY SHOWN				LIST OF MATERIAL							
				UNLESS OTHERWISE SPECIFIED				DRWN: 7/20/51		7/2/52		<p>SLEEVE —</p> <p>269A5609 SHAFT</p> <p>REMOVAL, ARBOR PRESS</p>			
				DIMENSIONAL TOLERANCES				CHK'D		5/2/52					
				3 PLACE DECIMAL ± .010				APP'D: [Signature]		11/25/52					
				2 PLACE DECIMAL ± .03				APP'D: [Signature]		7/25/52					
				ANGULAR ± 0°30'				APP'D							
				DIMENSIONS TO BE MET BEFORE PLATING.				APP'D				<p>HUGHES TOOL COMPANY</p> <p>AIRCRAFT DIVISION</p> <p>CULVER CITY, CALIFORNIA</p> <p>HTH</p> <p>269A9268</p>			
NEXT ASSY				USED ON				NEXT ASSY		FINAL ASSY					
APPLICATION				QTY REQD				APP'D							
				CORNER RADIUS .062 ON C' BORES AND SPOT FACES OF 1.250 DIA. OR LESS — .093 RADIUS ON GREATER THAN 1.250 DIA.				APP'D				SCALE FULL			
								APP'D				CODE 02731 SHEET 1 OF 1			

OR EQUIV.

3.75 D.D. .062/.125 WALL ALUM. TUBING 2024-O COMM.

SHOP COPY